

MSP 204


Best bridge for HDMI to broadcasting SDI application!



Key Features

- 3G-SDI, HD-SDI and SD-SDI
- HDMI 1.3 or DVI 1.0
- Embedded audio
- Separate L/R analog or digital AES/EBU audio
- Automatic identification for input format
- DIP switch
- Remote configuration by USB

Dimensions

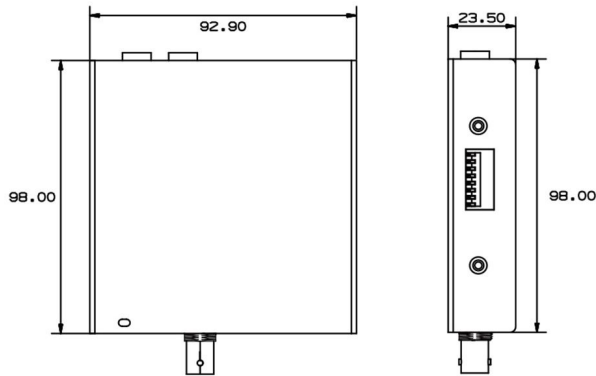


Specification

Connectors	Input	1 × HDMI
	Audio Input	2 × Analog audio
	Output	1 × SDI
	Power	5.4mm DC Socket
Performance	Input Resolution	HDMI: 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60
	Output Resolution	SDI: 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60
	Supported Standards	SDI: ITU-R BT.656, ITU-R BT.601, SMPTE 259M, SMPTE 292, SMPTE 297 HDMI: 1.3
	Power	Input Voltage: 12V DC (via universal Plug Pack) Max Power: 1.5A
Environment	Temperature	0°C~45°C
	Humidity	10%~85%
Physical	Weight	0.19kg (Net Weight) 0.48kg (Package Weight)
	Dimensions	98mm x 92.9mm x 23.5mm (Device Dimension)
		170mm x 120mm x 80mm (Package Dimension)

Order Codes

Product Code	Item
600-0204-01-0	MSP 204 HDMI SDI

Application

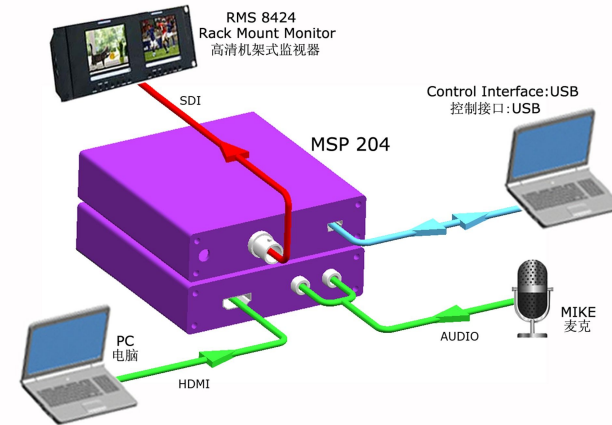

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgbink.com http://www.rgbink.com
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.