

MSP 210H


Best bridge for broadcasting HDMI to SDI application!



Key Features

- HDMI signals can be converted to SDI
- L/R audio signals or AES/EBU digital audio can be inserted and embedded
- SDI output up to 3G-SDI is supported
- Configure by on board DIP switch

Dimensions




Specification

Connectors	Input	1 × HDMI	
	Audio Input	2 × Analog audio	
	Output	1 × SDI	
	Power	5.4mm DC Socket	
Performance	Input Resolution	HDMI:	800×600@60 1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60
	Output Resolution	SDI:	480i 576i 720p@50/60 1080i@50/60 1080p@50/60
	Supported Standards	HDMI:	1.3
		SDI:	SD-SDI, HD-SDI, 3G-SDI
Power	Input Voltage	12V DC (via universal Plug Pack)	
	Max Power	1.5A	
Environment	Temperature	0°C~45°C	
	Humidity	10%~85%	
Physical	Weight	0.3kg (Net Weight)	
		0.61kg (Package Weight)	
	Dimensions	95.8mm x 92.9mm x 45mm (Device Dimension)	
		140mm x 160mm x 100mm (Package Dimension)	

Order Codes

Product Code	Item
600-0210-04-0	MSP 210H - HDMI SDI with Scan Converter

Application

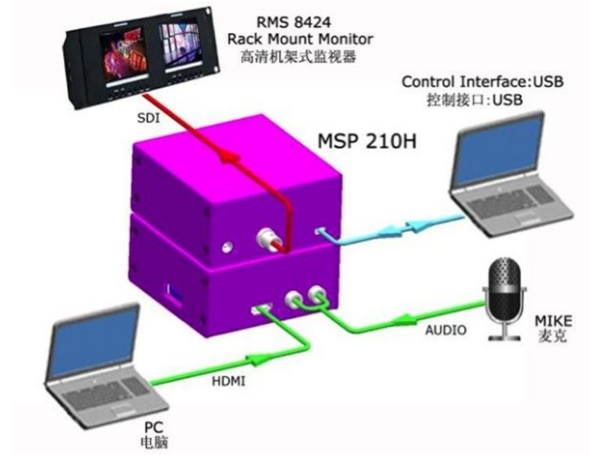

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgbink.com http://www.rgbink.com
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.