




### mini-mx-1s

#### All-In-One Portable Case for mini-mx


This Dedicated Portable Case made of high-strength PP material is equipped with a 13.3-inch IPS display and a switcher. Integrated audio and video switching, PTZ camera control, multi-view monitoring, and recording in one case, this portable and shock-resistant carry case is perfect for all sites, from music festival to lawn wedding, sports competition and other outdoor activities.




Education



Sports



Worship



Events




Conference

## Key Features

- Professional aviation connector to ensure high-quality performance
- Flexible standard connectors to meet personalized application
- Built-in 13.3" HD IPS monitor
- High strength PP flightcase features long-lasting durability
- hydraulic rod support to enhance the stability
- Powerful air-cooling system designed for outdoor use
- 4K multi-channel streaming video mixer
- Built-in 5.5 inch touch screen for menu operation
- Quad HDMI 2.0 inputs, resolutions up to 4K@60
- Dual HDMI 1.3 outputs for monitoring of multi-window PVW and PGM
- Dual MIC in, one Line-in, one Bluetooth in, dual audio out
- Mix for HDMI embedded and external audio
- One-key recording. Recording capacity of hard drive is up to 2T
- Support simultaneous streaming to 2 live streaming platforms via RTMP(S)
- Support multi-layer overlay, layer scaling and cropping
- 15 switching effect modes
- 5-direction joystick for controlling up to 4 PTZ cameras
- Save and store up to 16 scene presets. One-click for preset recall
- Support web control, compatible with mobile devices and computers, compatible with multiple operating systems
- Support Chroma Key
- One-key quick switch between portrait and landscape screen

## Application

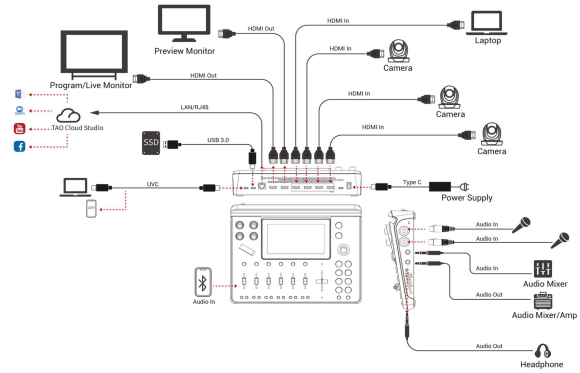

## Specification

<b>Connectors</b>	Input	HDMI 4K	3×HDMI-A
		SDI	1×BNC
		UVC (webcam)	1×USB-C
	Output	HDMI 2K	1×HDMI-A
	SDI	1×BNC	
	UVC	1×USB-C	
	USB (record)	1×USB-C	
	LAN (stream)	1×RJ45	
Audio In	MIC 1	1×CANNON Jack (XLR)	
	MIC 2	1×CANNON Jack (XLR)	
	LINE	1×6.35mm TRS Jack	
	Bluetooth	1×Bluetooth Module	
	HDMI	3×HDMI-A	
	SDI	1×BNC	
Audio Out	AUDIO	1×6.35mm TRS Jack	
		1×3.5mm mini-Jack	
	HDMI	1×HDMI-A	
	SDI	1×BNC	
	UVC	1×USB-C	
	LAN	1×RJ45	
	USB (record)	1×USB-C	
<b>Performance</b>	Input Resolution	HDMI	1280×720@50/59.94/60   1024×768@60   1280×768@60   1280×800@60   1280×1024@60   1360×768@60   1366×768@60   1440×900@60   1600×1200@60   1680×1050@60   1920×1200@60   1920×1080i@50/59.94/60   1920×1080p@23.98/24/25/29.97/30/50/59.94/60   3840×2160p@30/50/60   4096x2160@30/50/60
		SDI	1080P@23.98/24/25/29.97/30/50/59.94/60
	Output Resolution	HDMI	1280×720@50/60   1024×768@60   1280×768@60   1280×1024@60   1360×768@60   1920×1080@23.98/24/25/29.97/30/50/59.94/60
		SDI	1080P@23.98/24/25/29.97/30/50/59.94/60
		USB (webcam)	1920×1080@24/25/30/50/60
	Video	Video Formats	HDMI 2.0   HDCP 2.2
		Grayscale Processing	10bit
		Video Sampling	4:4:4 YUV
		Video Latency	<4 frames
	Audio	Line In Delay	up to 8 frames
	Audio Format	HDMI Linear PCM, 24 bits/48 kHz, 2 ch USB Linear PCM, 16 bits/48 kHz, 2 ch	
Record/Storage	Record Formats	MP4	
	Disk Formats	FAT32(≤32 GB)   exFAT(64GB~2T)	
Supported Standards	HDMI	2.0	
	USB	3.0	
	H.265	ITU-T H.265/ ISO/IEC 23008-2	
<b>13.3" Display</b>	Screen Size	13.3"	
	Panel Type	IPS	
	Display Color	16.7M, 72%NTSC/16.7M, 100% sRGB	
	Resolution	1920×1080 pixels	
	Aspect Ratio	1000:1	
	Gamut	72%	
	Brightness	350 cd/m <sup>2</sup>	
	Refresh Rate	60Hz	
View Angle	85°/85°(L/R) 85°/85°(U/D)		
<b>Power</b>	Input Voltage	PD 12V/5A	
	Maximum Power	60W	
<b>Physical</b>	Outer Size	460mm × 360 mm × 200mm	
	Material	PP	
	Color	Black	
	Packaged Weight	9.23 kg	
	Packaged Dimension	470mm × 370mm × 210mm	

## Order Codes

Order Codes	Item
230-0004-05-0	mini-mx-1s (1 × mini-mx + 1 × Flightcase Suite + 1 × 13.3" Display)

## Contact us

Tel: +86-592-5771197  
 Fax: +86-592-5788216  
 E-mail: sales@rgblink.com  
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3,  
 Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

